


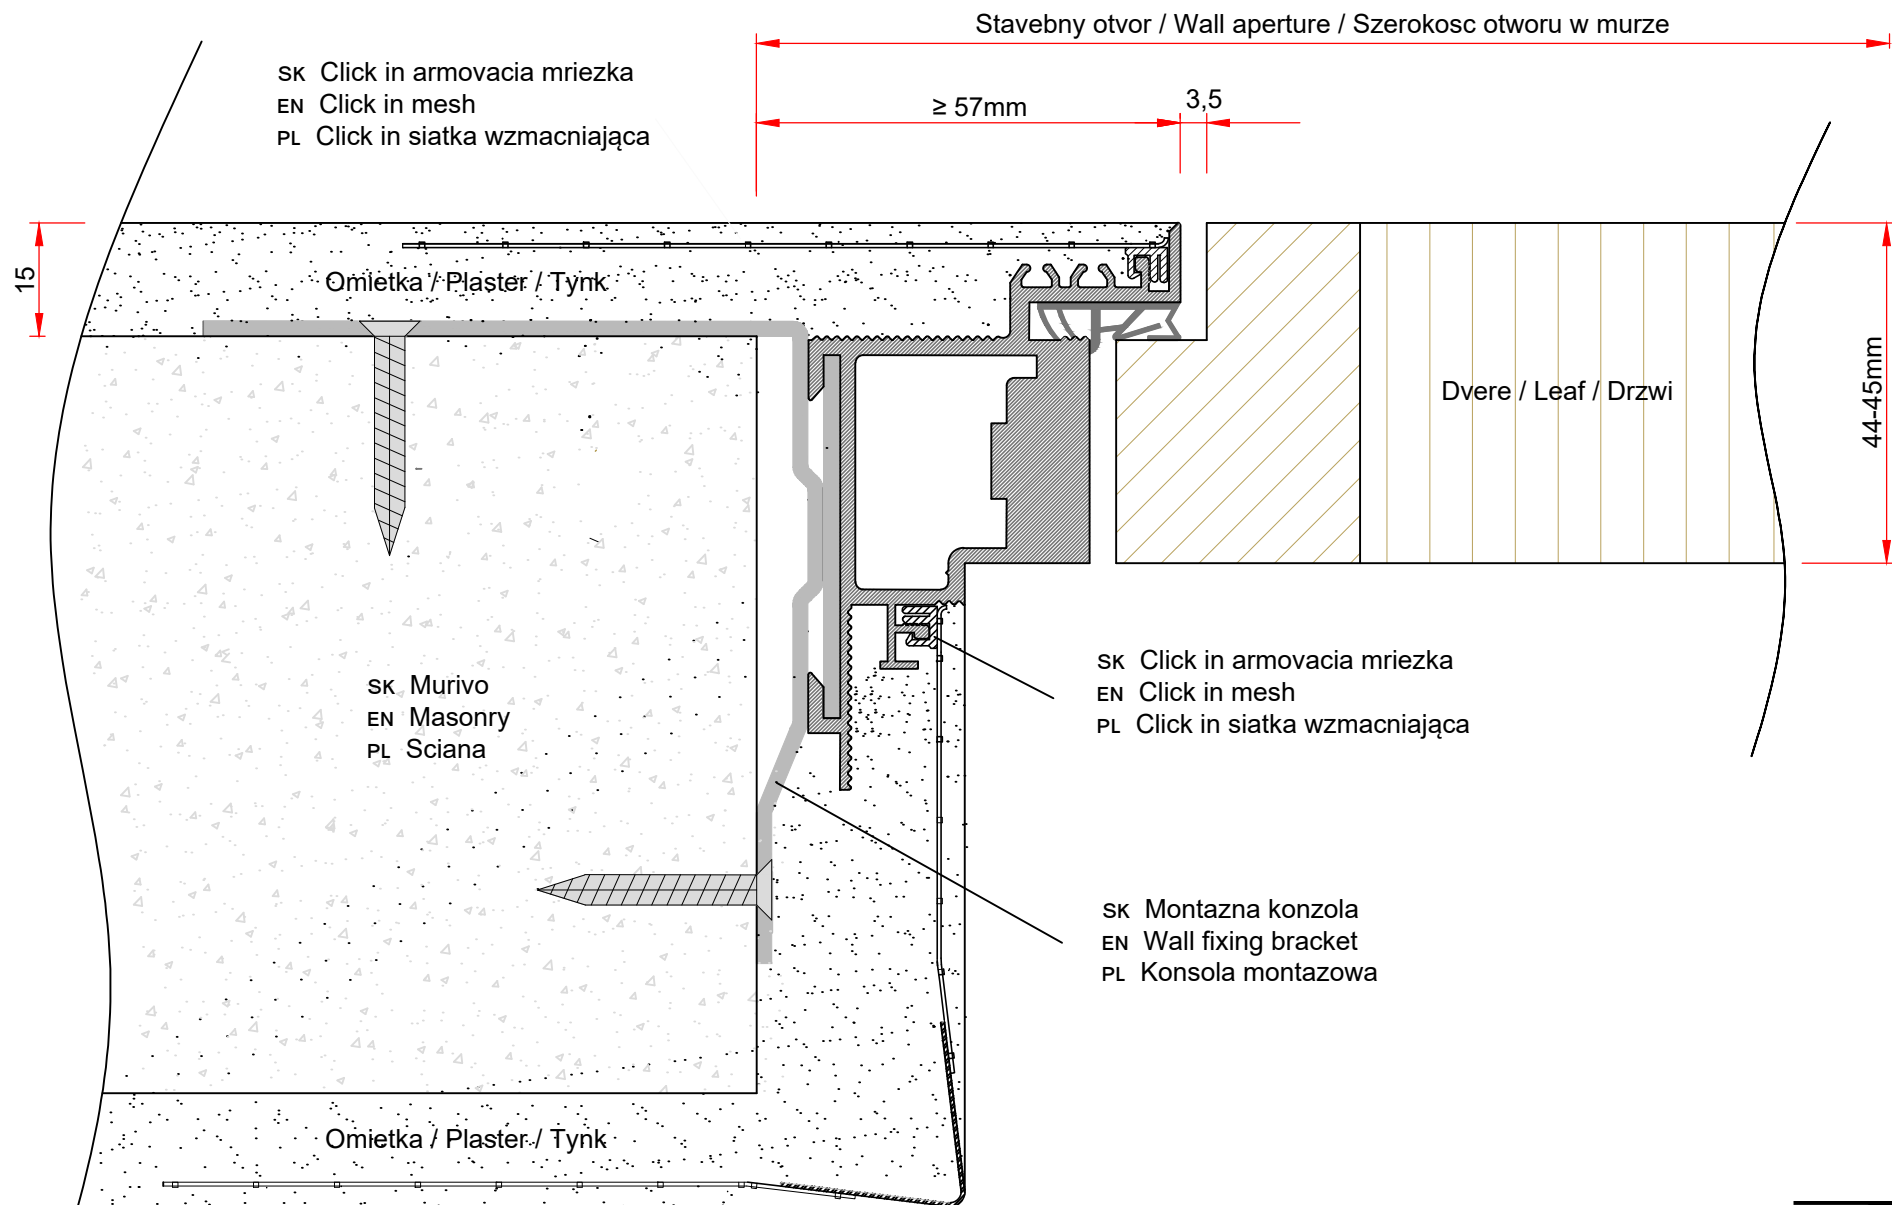

* SK Pri zníženej hrúbke omietkovej vrstvy je možné zasekať priestor v murive pre montážne konzoly a posunúť tak celú zárubňu hlbšie do stavebného otvoru.

EN When using a thinner layer of plaster, it is possible to chase out an opening in the wall for the mounting brackets and thus recess the entire door frame deeper into the wall aperture.

METAMOD s.r.o.

METAMOD, s.r.o. - AGS Systems srl/GmbH		
Drawing	TCS45	Item No. 10645
Scale 1:1	Date	05.05.2014
	Modified	