


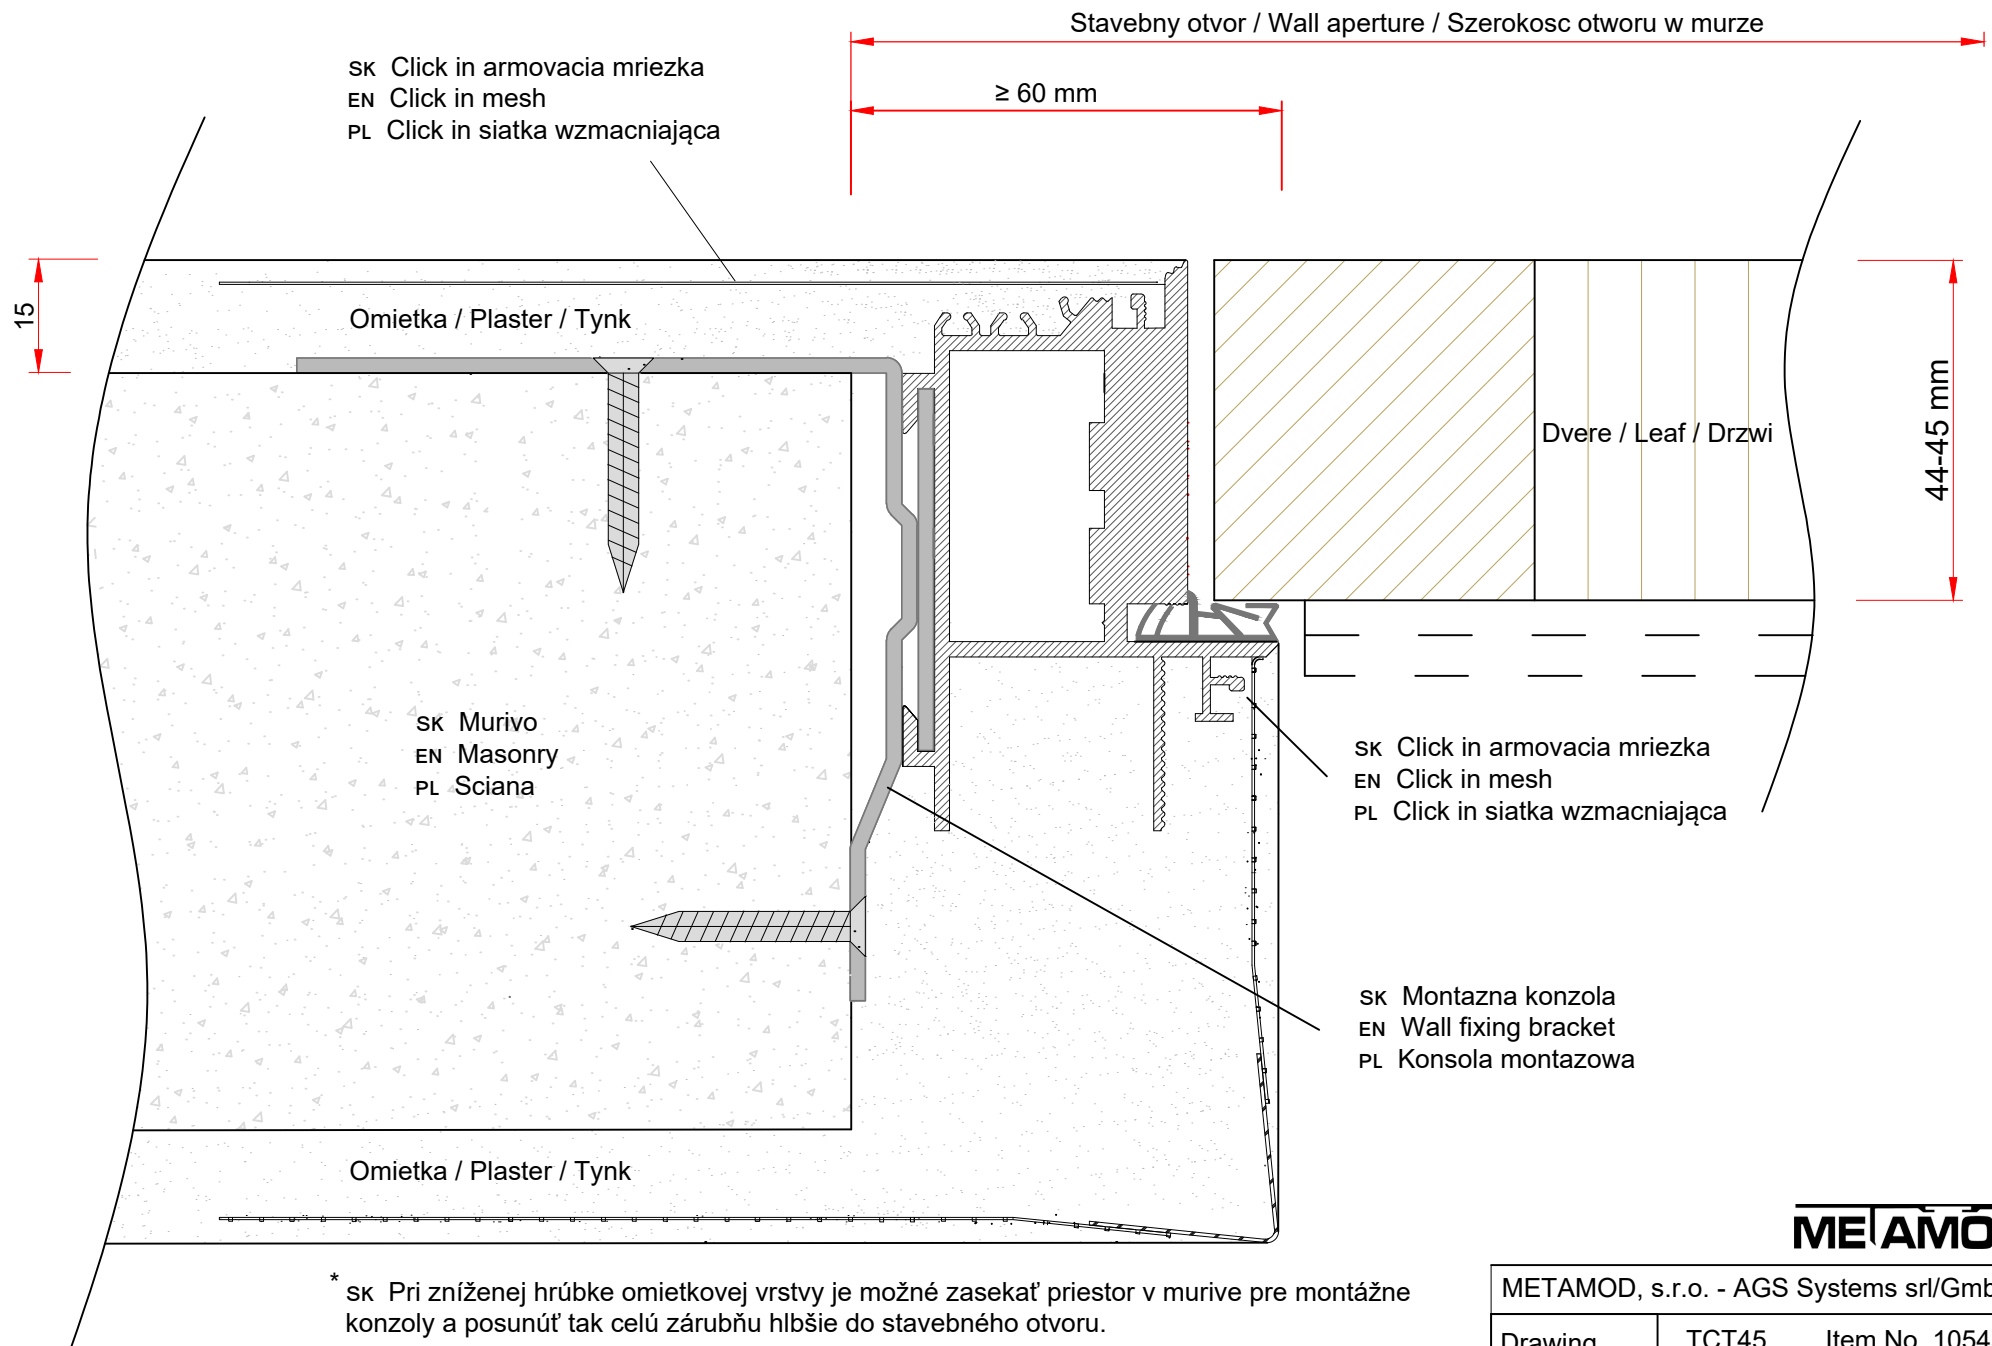

\* SK Pri zníženej hrúbke omietkovej vrstvy je možné zasekať priestor v murive pre montážne konzoly a posunúť tak celú zárubňu hlbšie do stavebného otvoru.

EN When using a thinner layer of plaster, it is possible to chase out an opening in the wall for the mounting brackets and thus recess the entire door frame deeper into the wall aperture.

**METAMOD** s.r.o.

METAMOD, s.r.o. - AGS Systems srl/GmbH

|           |          |                |
|-----------|----------|----------------|
| Drawing   | TCT45    | Item No. 10545 |
| Scale 1:1 | Date     | 05.05.2014     |
|           | Modified |                |

This drawing is copyright by AGS-systems and exclusive ownership, protected by law and cannot be reproduced without written affirmation.

METAMOD, s.r.o. - 085 01 Bardejov (Slovakia)  
tel. +421 948 182 171 - info@metamod.sk