


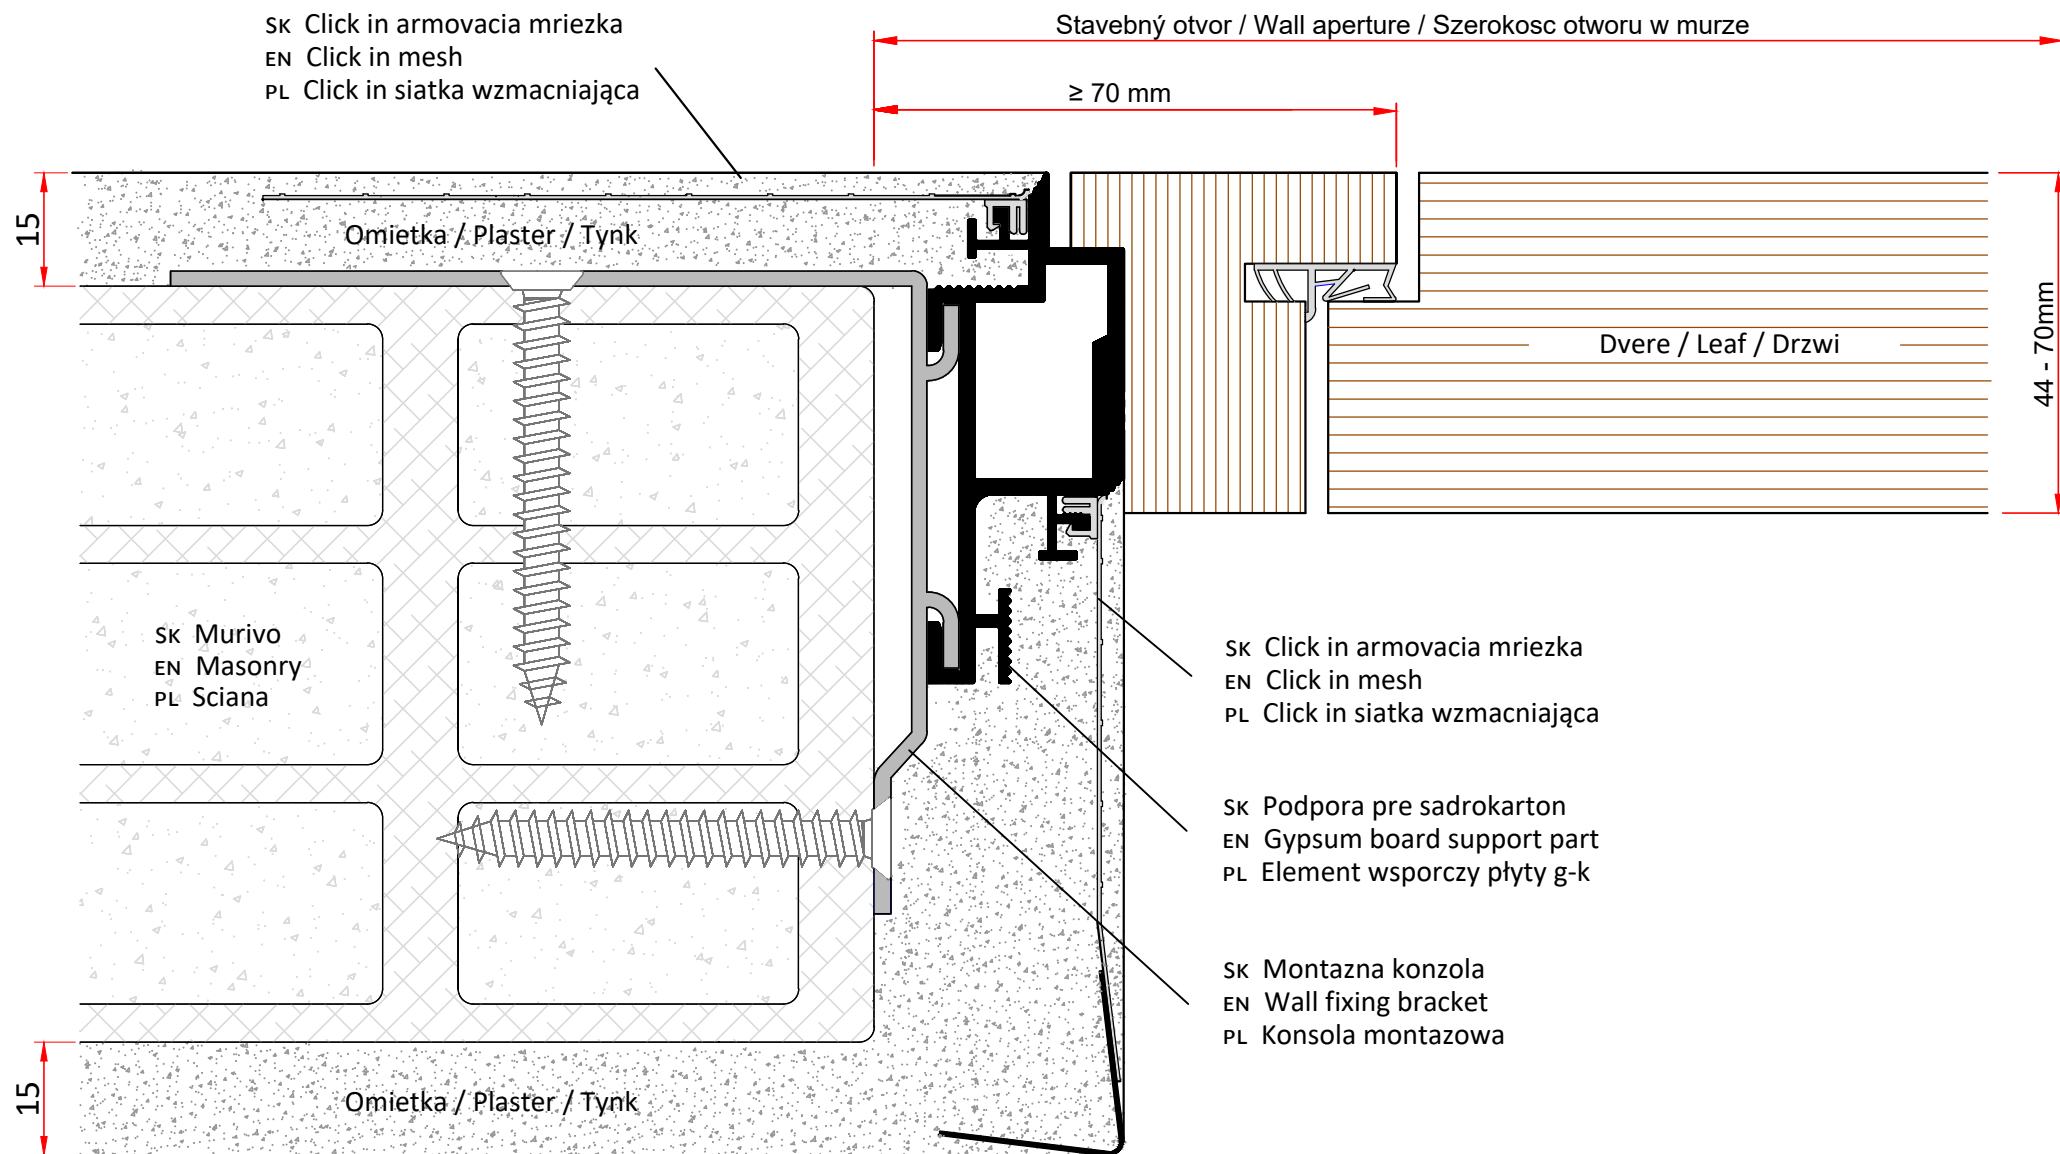

* SK Pri zníženej hrúbke omietkovej vrstvy je možné zasekať priestor v murive pre montážne konzoly a posunúť tak celú zárubňu hlbšie do stavebného otvoru.

EN When using a thinner layer of plaster, it is possible to chase out an opening in the wall for the mounting brackets and thus recess the entire door frame deeper into the wall aperture.

METAMOD s.r.o.

METAMOD, s.r.o. - AGS Systems srl/GmbH		
Drawing	TP	Item No. 10121
Scala 1:1	Date	16.09.2021
	Modified	

This drawing is copyright by AGS-systems and exclusive, protected by law and cannot reproduced with out written affirmation

METAMOD, s.r.o. - 085 01 Bardejov (Slovakia)
tel. +421 948 182 171 - info@metamod.sk